

How to Flush Filters Guide



TopBrewer 
Coffee Reimagined


How to Flush Filters Guides

Firstly, we need to establish where the water shut off valve & filters are located. This will determine whether this can be successfully completed by onsite facilities or a Scanomat visit is required.

In most cases, the water shut off valve & water filters are either in the left or the right-hand cupboard of the Scanomat equipment as illustrated ->. (TopWater installations, the filters are generally locating in the same cupboard).

In smaller cases, you will find that the water shut off valve & filters are located behind the Scanomat equipment, or in a void at the rear of the installation. If this is the case, Scanomat will need to assist or attend to flush the filters. Please contact service@scanomat.co.uk for assistance.


The number of filters in circuit also differ on installation type. Please refer to the table below. This table will give you the total number of filters that need flushing.

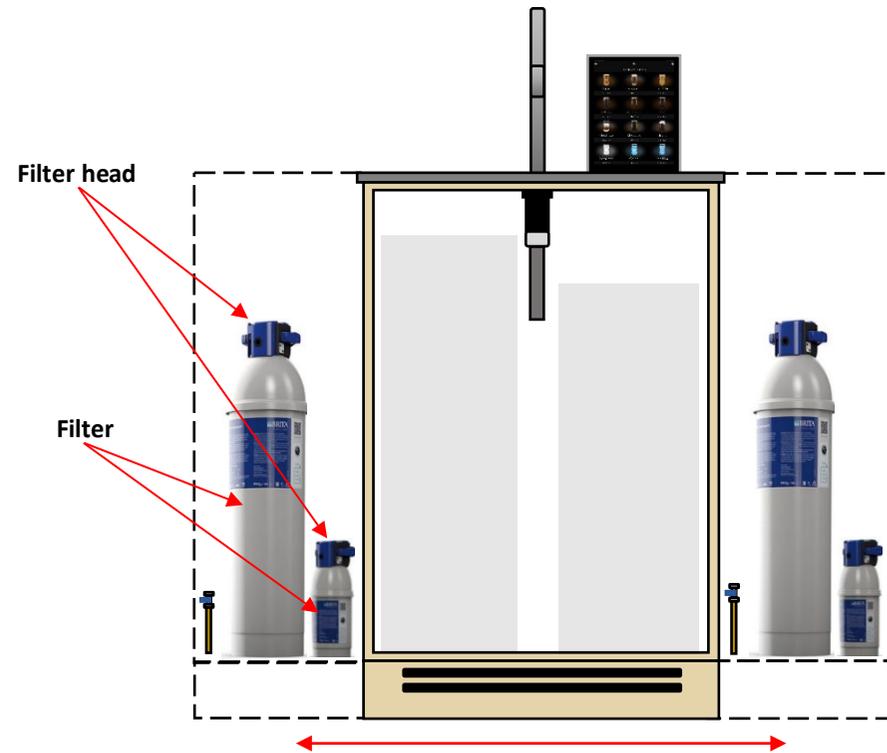

Installation Type	Brita c500	Brita c50	Brita C1000 AC	Total No. to Flush
TopBrewer - Fridge	✓	✓		2 filters to flush
TopBrewer - Fridge - Chiller	✓	✓	✓	3 filters to flush
TopJuicer			✓	1 filter to flush
TopWater			✓	1 filter to flush

How to Flush Filters Guides

1). The mechanism that controls the water being flushed is either a small round grey button (a) or a small grey slider (b) built into the top the filter head.

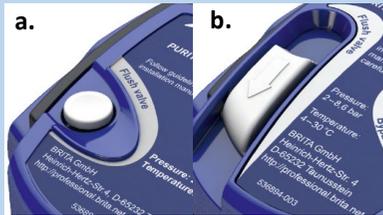

2). **Sliding flush mechanism (Most common)** - Push the slider in the direction of the red arrow to start flushing process. To stop it flushing, push the slider back in the opposite direction.



3). **Push button flush mechanism** – Push button down & hold it down to flush. When you release the button, it will stop flushing.



4). The hose you need to flush is located on the back of the blue filter head. It is a grey silicon tube as pictured below.



5). To flush the filters, you will need to remove them from the cupboard (**be extra careful not to damage or kink the water lines when moving**), a large bucket & enough space around the filters to locate the bucket, so it can sit flat on the floor.

(Add Picture)

6). Now you need to identify the filter type. The filter type is located on the blue sticker on the side of the filter. You will need this to determine how many litres you need flush. (**refer to flush volume table on pg.3**)



7). Place the first filter to be flushed in position, making sure the grey flush hose on the filter head (**refer to section No.4**) is inside the bucket (**refer to section No.4**) is inside the bucket before you start the flushing procedure.

(Add Picture)

8). Locate the flow meter digital display & record the figure displayed. The flow meter digital displays are attached to the blue filter heads. **Note:** - C50 filter does not have a digital flow meter display.



How to Flush Filters Guides

<p>9). Now turn the water on from the mains water shut off valve. The filters are now ready to be flushed.</p> <p>(Add Picture)</p>	<p>10). When ready, hold the grey flush hose from the filter head & activate the flush mechanism as instructed above in section No.2 or No.3. As soon as you do this you will start to get water flowing through the grey flush hose into the bucket.</p> <p>(Add Picture)</p>	<p>11). Now the filter is flushing, pay attention to the digital flow meter display. The figure you recorded in section No.8 will start to run down. Once the figure has ran down to the required amount listed on the flush volume table below, switch the flush mechanism on the filter head off. Follow the same procedure for the remaining filters.</p> <p>(Add Picture)</p>	<p>12). Once complete, place the filters back into the cupboard, again, being extra careful not to damage or kink the water lines. Clean & dry up any spillages on the floor, place a non-slip sign to area. The Scanomat equipment is now ready to use...Nice work!</p> <p>(Add Picture)</p>
--	---	--	--

Brita Filter Type	Flush Volume (4> weeks of non-use)
C1000 AC	10 litres
C50	20 litres
C150	30 litres
C500	100 litres

*****This will mean you have to fill several buckets & this will take some time to complete. DO NOT LEAVE THE FILTER UNATTENDED WHILST FLUSHING, as this will lead to flooding*****